

Picco 12V/72W - primary switched power supply / 1-phase In: 110-230VAC / OUT: 12 - 15VDC - Screw connection

INPUT: 90...264 V AC  
 OUTPUT: 24 V DC  
 Current: 4.2 A  
 Screw terminals

### Image



- stable output voltage, short-circuit and overload protected
- Wide voltage input
- touch protected (EN 60529) IP20

Vicarious picture

### Input

Voltage range	100...240 V AC; 100...125 V DC
Input current	1.7 A (115 V AC); 1 A (230 V AC)
Inrush current after 1 ms	<= 60 A
Primary fusing	max. 16 A
Frequency	50/60 Hz

### Output

Output voltage	12 V DC (SELV), $\pm 1\%$ ; 12...15 V adjustable
Output current	6 A (+50 °C); 0.6 A (+70 °C)
	85 % (110 V AC); 86 % (230 V AC)
Mains failure bridging	$\geq 10$ ms (115 V AC)
Ripple	$\leq 20$ mV rms
Spikes	$\leq 100$ mV p-p
Protection	Short-circuit and overload protected
LED display	LED (green) for output voltage
Parallel usage/serial usage	no/yes (max. 2 units)

### General data

Standards	(EN 60950-1), (EN 61204-3), (EN 55022 B), (EN 61000-3-2)
Mounting method	DIN-rail mountable TH35 (EN 60715)
Terminals	Screw terminal, 0.14...1.5 mm <sup>2</sup>
Relative humidity	5...95 %, no condensation
Temperature range	0...+50 °C, to +70 °C derating (storage temperature -25...+70 °C)

### Commercial data

Net weight	400
Net weight	370
Weight unit	gram
Basic unit	pc.
Customs tariff number	85044090
Unit (piece)	1
Limited value	1


### Comments

This switch mode power supplies meet the (EN 61000-3-2) standard for harmonic current.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Circuit diagram

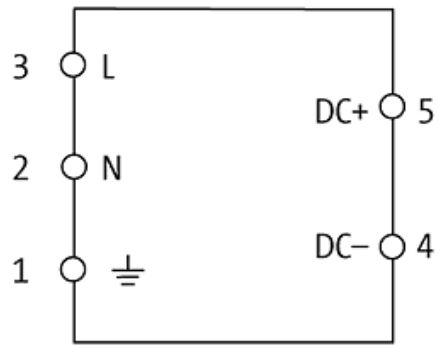

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

