


**MOSA M12 male straight field-wireable (IDC) Slimline; 0,34-0,5qmm; 5-pol.**

Male straight  
5-pole  
Connection diameter: 0.34...0.5 mm<sup>2</sup>

#### Image

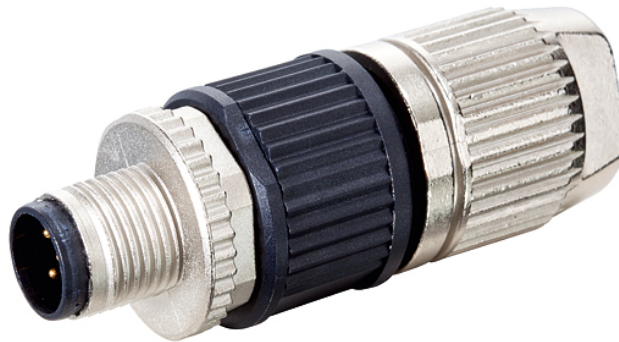

Vicarious picture

#### Approvals



#### Form

12533

#### Technical Data

Operating voltage	max. 50 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection diameter	0.34...0.5 mm <sup>2</sup> (conductor diameter $\geq$ 0.1 mm)
Clamping range (cable diameter)	4.7...6 mm
Wire isolation	PVC, PP
Outer wire diameter	1.2...2.0 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

#### Commercial data


Net weight	28
Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

#### Comments


The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

# Male

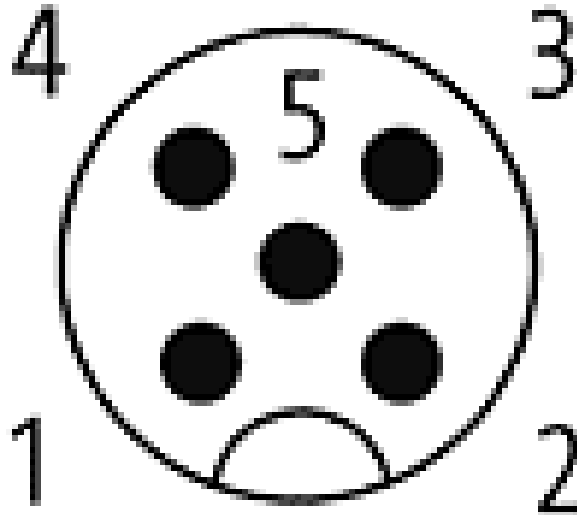

Circuit diagram

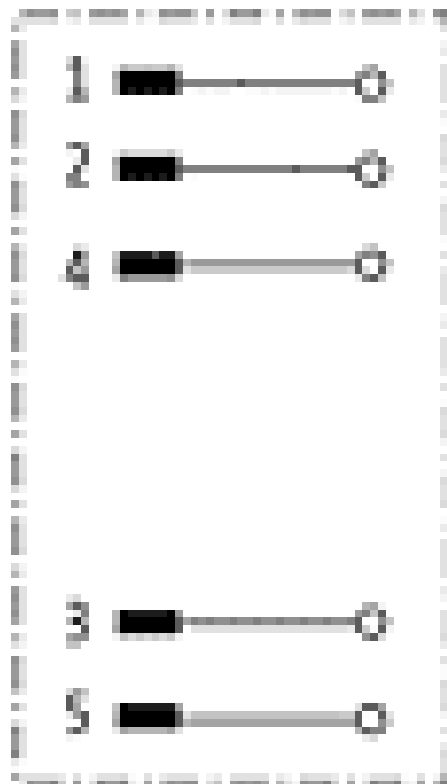

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

