

MOSA M12 male straight field-wireable (IDC) Slimline; 0,14-0,34qmm;shielded; 4-pol.

Male straight

4-pole

Connection diameter: 0.25...0.5 mm²

Image



Vicarious picture

Approvals



Express shipments

Form

12551

Technical Data

Operating voltage	max. 50 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection diameter	0.14...0.34 mm ² (conductor diameter \geq 0.1 mm)
Clamping range (cable diameter)	5.5...7.2 mm
Wire isolation	PVC, PP
Outer wire diameter	1.2...1.6 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data

Net weight	52
Net weight	52
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Comments


Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.
Further cable lengths on request.

Contact layout

Male

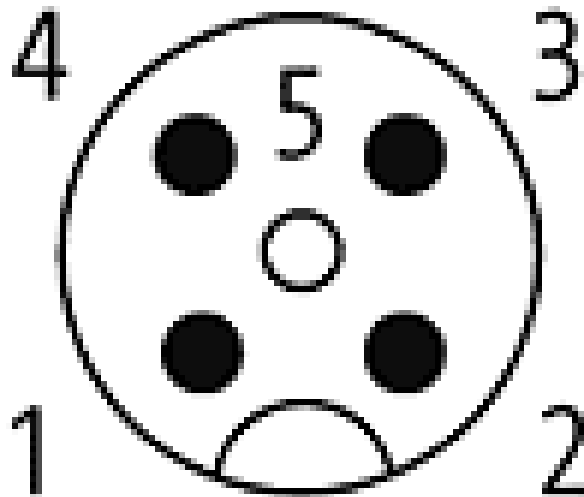

Circuit diagram

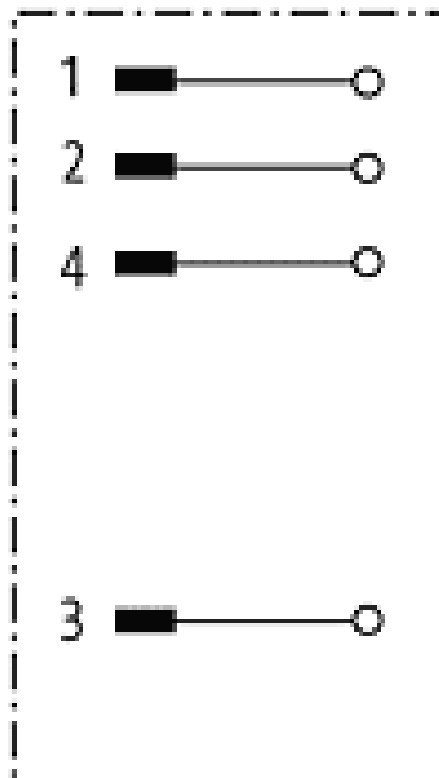

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

