

**M16 male, 0°, 14p. open end 2m PUR cable 8x0,25/2x0,5**

Male straight  
14-pole  
12-pole used

### Image



Vicarious picture


<b>Form</b>	16751
<b>Technical Data</b>	
Operating voltage	24 V AC/DC
Operating current per contact (40 °C)	max. 3 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking of ports	
Temperature range	-25...+85 °C, depending on cable quality
<b>Cable</b>	
No./diameter of wires	8 × 0.25 + 2 × 0.5 mm <sup>2</sup>
Wire isolation	PVC
C-track properties	yes
Jacket	PUR/PVC
Outer diameter	approx. 8.0 mm
Bend radius (mobile)	15 × outer diameter
Temperature range (fixed)	-25...+70 °C
Temperature range (mobile)	-5...+70 °C
<b>Commercial data</b>	
Net weight	193
Net weight	193
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1
<b>Comments</b>	Further cable lengths on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

## Contact layout

# Male

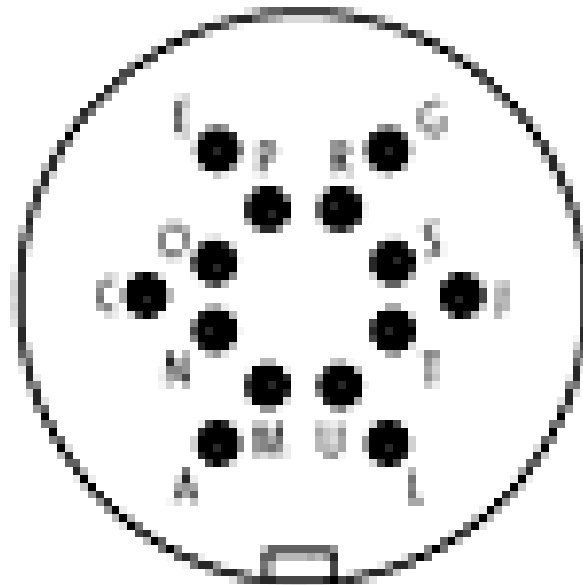

## Circuit diagram

P	white
J	green
T	yellow
S	gray
G	pink
R	red
E	black
O	violet
A	brown 0.75 mm <sup>2</sup>
M	
L	blue 0.75 mm <sup>2</sup>
U	

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

