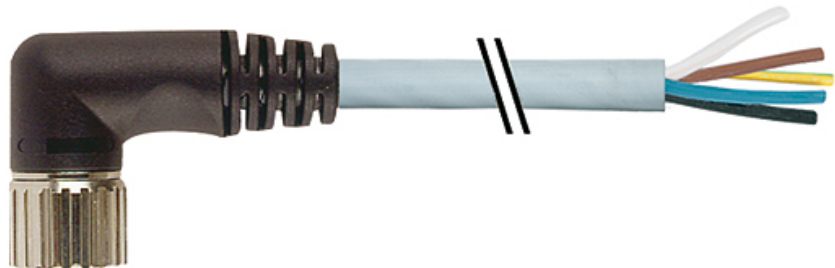


**M23 female 90°, 12-pole, with open ended cable 5m PUR 8x0,34/3x0,75**

Female 90°  
12-pole  
11-pole used  
for 8-way distribution box, 4-pole

**Image**

Vicarious picture


<b>Form</b>	23151
<b>Technical Data</b>	
Operating voltage	max. 125 V AC/DC
Operating current per contact (40 °C)	max. 7.5 A
Locking of ports	Screw thread M23 × 1 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C, depending on cable quality
<b>Cable</b>	
No./diameter of wires	8 × 0.34 + 3 × 0.75 mm <sup>2</sup>
C-track properties	2 Mio.
Jacket	PUR/PVC
Outer diameter	approx. 8.1 mm
Bend radius (mobile)	12 × outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
<b>Commercial data</b>	
Net weight	690
Net weight	690
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

**Comments**


Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

# Female

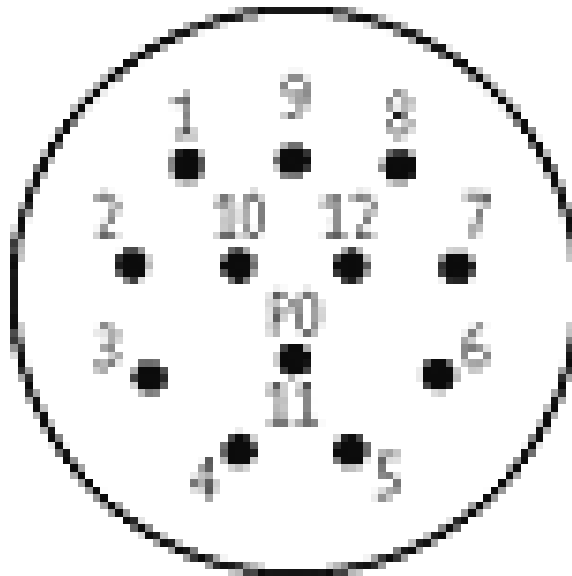

Dimension drawing

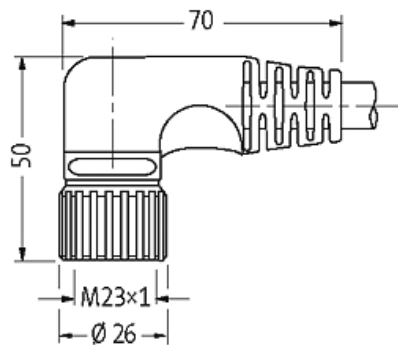

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

