

M23 female straight, 19-pole, with open ended cable 5m PUR/PVC 16x0,34/3x0,75

Female straight
 19-pole
 19-pole used
 for 8-way distribution boxes, 5-pole

Image

Vicarious picture

Form	23251
Technical Data	
Operating voltage	max. 125 V AC/DC
Operating current per contact (40 °C)	max. 7.5 A
Locking of ports	Screw thread M23 × 1 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C, depending on cable quality
Cable	
No./diameter of wires	16 × 0.34 + 3 × 0.75 mm ²
C-track properties	2 Mio.
Jacket	PUR/PVC
Outer diameter	approx. 10.0 mm
Bend radius (mobile)	12 × outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
Commercial data	
Net weight	960
Net weight	960
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1


Comments

Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.
 The resistance to aggressive media should be individually tested for your application. Further details on request.


All data on this data sheet was compiled carefully.
 Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Female

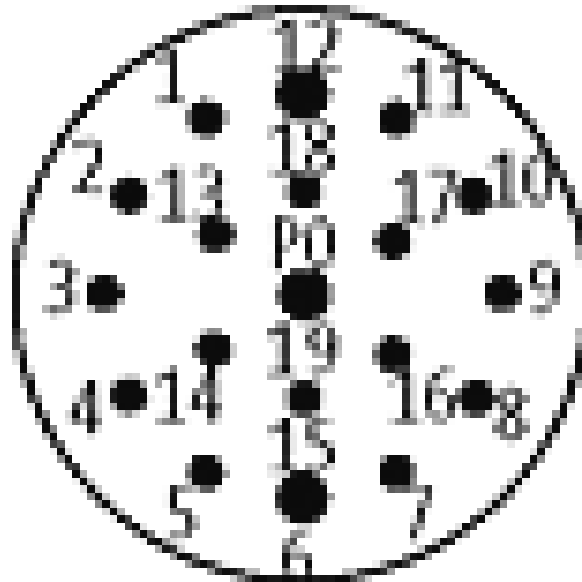

Dimension drawing

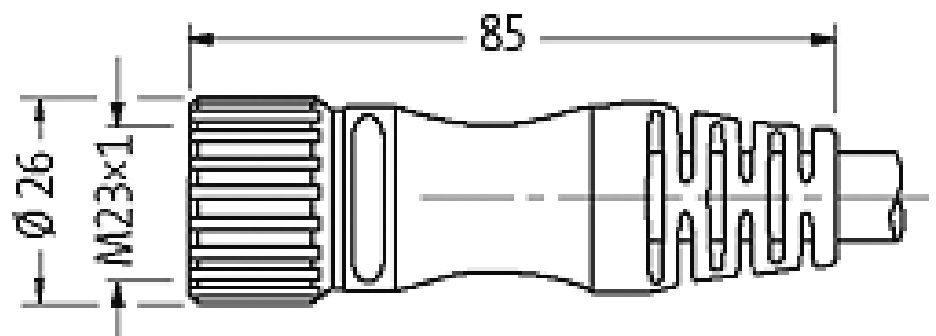

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

