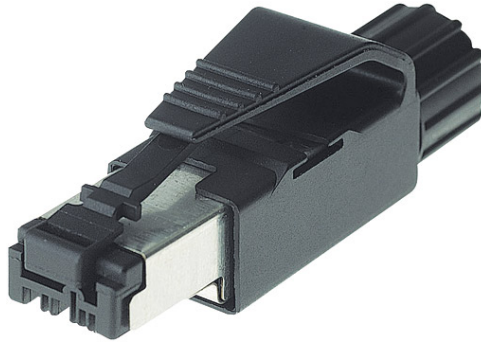


RJ45-Ethernet-connector male straight, 4pol, shield IP20, field-wireable, D=6,5 ... 6,9mm

Male RJ45, CAT 5
4-pole, shielded
Protection IP20

Image

Vicarious picture

Technical Data

Operating voltage	60 V DC
Operating current per contact (40 °C)	max. 1,76A
Connection diameter	0.25...0.34 mm ² (AWG 22...24)
Clamping range (cable diameter)	6.5...6.9 mm
Temperature range	-40...+70 °C
Protection	IP20
Transfer parameters	Category 5/class D to 100 Mhz (ISO/IEC 11801:2002), (EN 50 173-1)
Transfer rate	10/100 MBit/s full duplex

Commercial data

Net weight	49
Net weight	49
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

Male

6 3 2 1

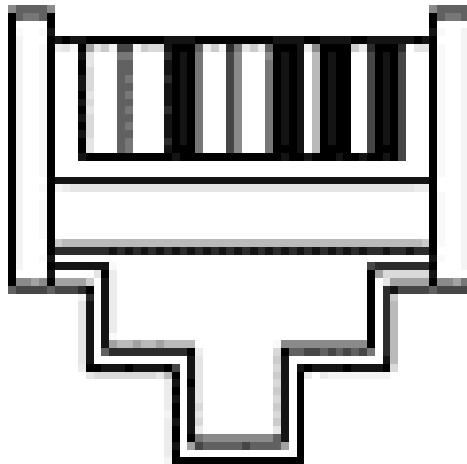

Circuit diagram

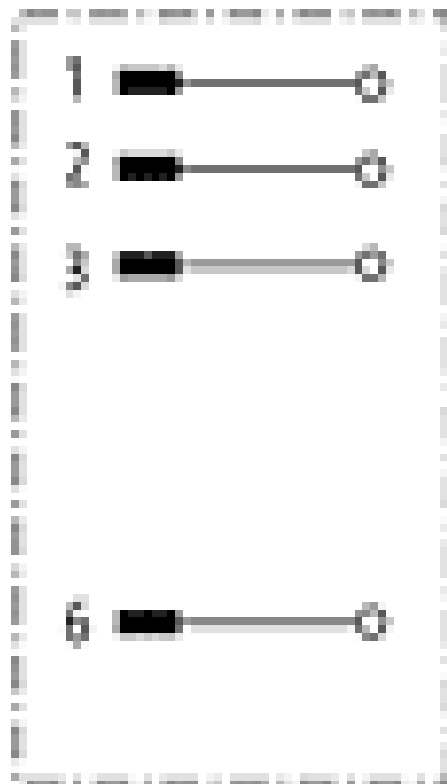

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

