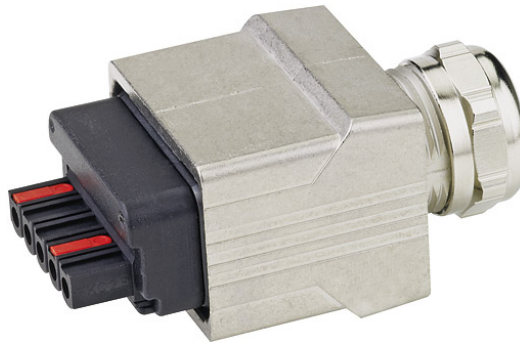


Push Pull Power connector self-wireable 5-poles

Push Pull Power
Male straight
5-pole
Spring clamp terminals
Connection diameter 0.75...2.5 mm²

Image

Vicarious picture

Form

99601

Technical Data

Operating voltage	24 V AC/DC
Operating current per contact (40 °C)	max. 16 A
Connection diameter	Cable diameter 0.75...2.5 mm ²
Clamping range (cable diameter)	9...13 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-40...+70 °C

Commercial data

Net weight	92
Net weight	92
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout



Circuit diagram

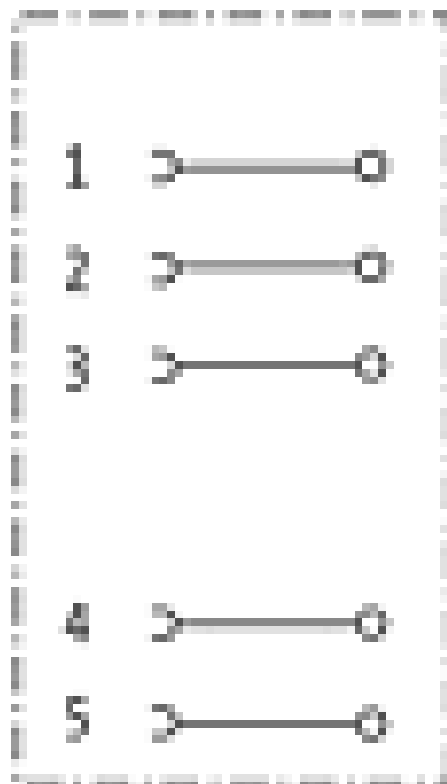

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

