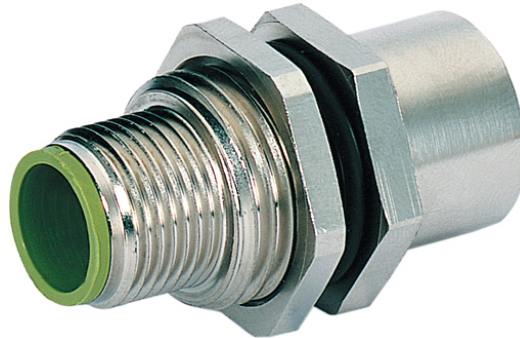


M12-Schaltschrankdurchführung 6pol A-cod


Control cabinet entry system M12
A-coded, 6-pole, shielded

Image


Vicarious picture

Form	46111
Technical Data	
Operating voltage	max. 24 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Mounting set	M16 × 1.5 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C
Commercial data	
Net weight	27
Net weight	27
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

Circuit diagram

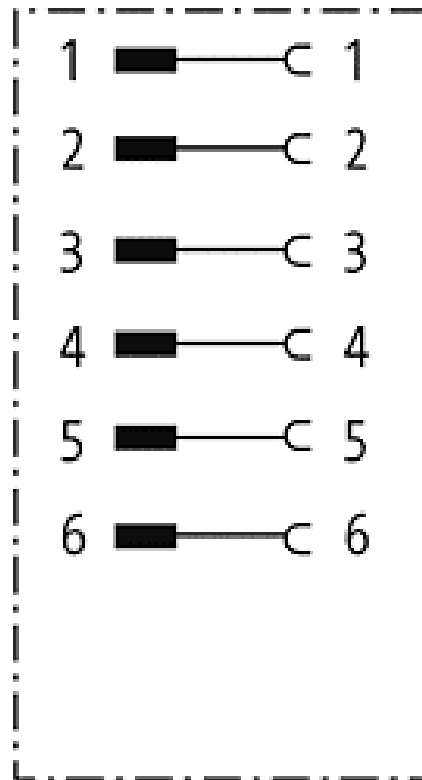

Dimension drawing

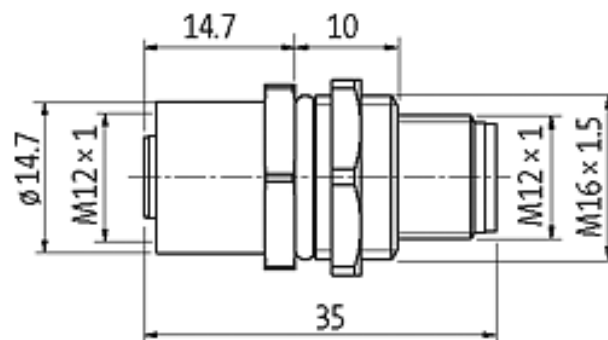

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

