

Connection cap with homerun cable

for 4-way distribution boxes, 5-pole
PUR/PVC
potentially separated

Image

Vicarious picture

Approvals**Form**

84659

Technical Data

Housing Plastic, flame retardant
Temperature range -20...+80 °C, depending on cable quality

You can chose from the following variants:

	Art.-No.
Cap with cable for d-box M12 4-way 5-pole pot.-sep. 3m PUR/PVC-JB, 8x0,34+5x0,75	8000-84659-3740300
Cap with cable for d-box M12 4-way 5-pole pot.-sep. 5m PUR/PVC-JB, 8x0,34+5x0,75	8000-84659-3740500
Cap with cable for d-box M12 4-way 5-pole pot.-sep. 10m PUR/PVC-JB, 8x0,34+5x0,75	8000-84659-3741000
Cap with cable for d-box M12 4-way 5-pole pot.-sep. 15m PUR/PVC-JB, 8x0,34+5x0,75	8000-84659-3741500
Cap with cable for d-box M12 4-way 5-pole pot.-sep. 20m PUR/PVC-JB, 8x0,34+5x0,75	8000-84659-3742000
Cap with cable for d-box M12 4-way 5-pole pot.-sep. 25m PUR/PVC-JB, 8x0,34+5x0,75	8000-84659-3742500
Cap with cable for d-box M12 4-way 5-pole pot.-sep. 30m PUR/PVC-JB, 8x0,34+5x0,75	8000-84659-3743000

Comments



Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Contact layout

M12 Females 5-pole

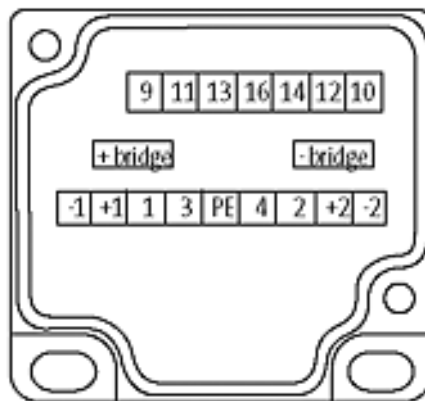

for 2 signals per port

Dimension drawing

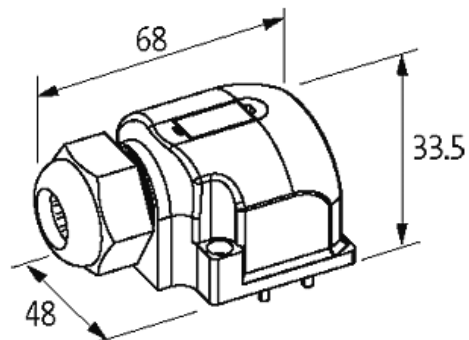

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

