

Connection cap with homerun cable

for 8-way distribution boxes, 5-pole
potential separation as option

Image

Vicarious picture

Approvals**Form**

88659

Technical Data

Housing Plastic, flame retardant
Temperature range -20...+80 °C, depending on cable quality

You can chose from the following variants:



	Art.-No.
Cap with cable for d-box M12 8-way 5-pole pot.-sep. 3m PUR/PVC-JB, 16x0,34+5x0,75	8000-88659-4040300
Cap with cable for d-box M12 8-way 5-pole pot.-sep. 5m PUR/PVC-JB, 16x0,34+5x0,75	8000-88659-4040500
Cap with cable for d-box M12 8-way 5-pole pot.-sep. 10m PUR/PVC-JB, 16x0,34+5x0,75	8000-88659-4041000
Cap with cable for d-box M12 8-way 5-pole pot.-sep. 15m PUR/PVC-JB, 16x0,34+5x0,75	8000-88659-4041500
Cap with cable for d-box M12 8-way 5-pole pot.-sep. 20m PUR/PVC-JB, 16x0,34+5x0,75	8000-88659-4042000
Cap with cable for d-box M12 8-way 5-pole pot.-sep. 25m PUR/PVC-JB, 16x0,34+5x0,75	8000-88659-4042500
Cap with cable for d-box M12 8-way 5-pole pot.-sep. 30m PUR/PVC-JB, 16x0,34+5x0,75	8000-88659-4043000

Comments

Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

M12-Females 5-pole

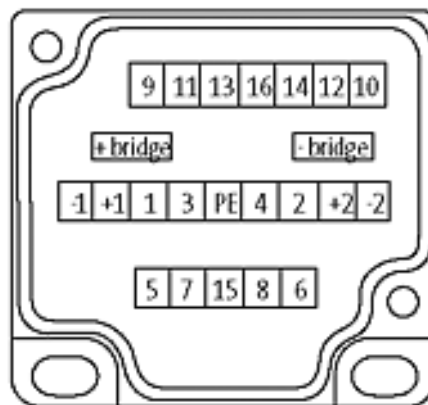

for 2 signals per port

Dimension drawing

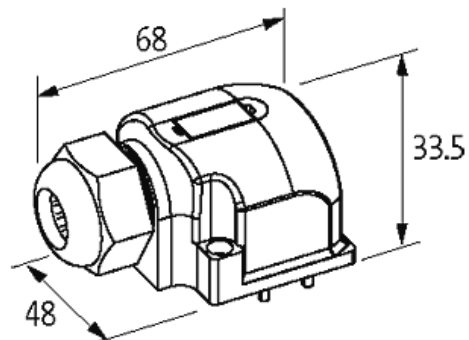

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

