

Cap big with plug, spring term. 21-pole for use with 4-,6-,8-way d-box M12 5-pole

Cap for 4-, 6-, and 8-way distribution box, 5-pole
Spring clamp plug-in terminals

Image



Vicarious picture

Approvals



Technical Data

Total current	max. 2 x 8 A
Connection	Spring clamp terminals max. 1.5 mm ² (AWG 16)
Housing	Plastic, flame retardant
Temperature range	-20...+80 °C, depending on cable quality

Commercial data



Net weight	48
Net weight	48
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

M12-Females 5-pole

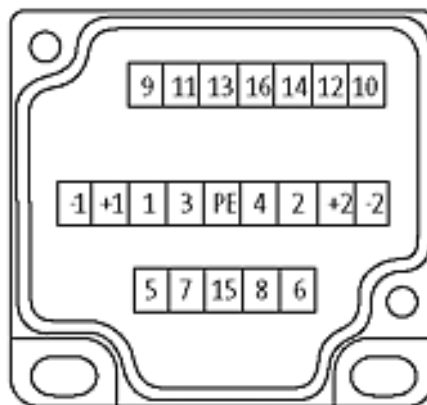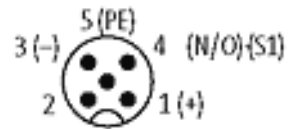

for 2 signals per port

Dimension drawing

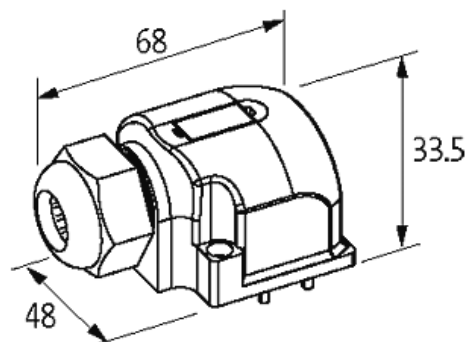

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

