

T-coupler Nano M8-male 4p./ 2x M8-female 3p.

T-coupler (Nano) M8 - M8
4-pole
Distribution function (N/O)

Image

Vicarious picture

Form

41211

Technical Data

Operating voltage	30 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Contact resistance	<= 5 MOhm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

General data

Test isolation voltage	0.8 kV rms
------------------------	------------


Commercial data

Net weight	14
Net weight	14
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

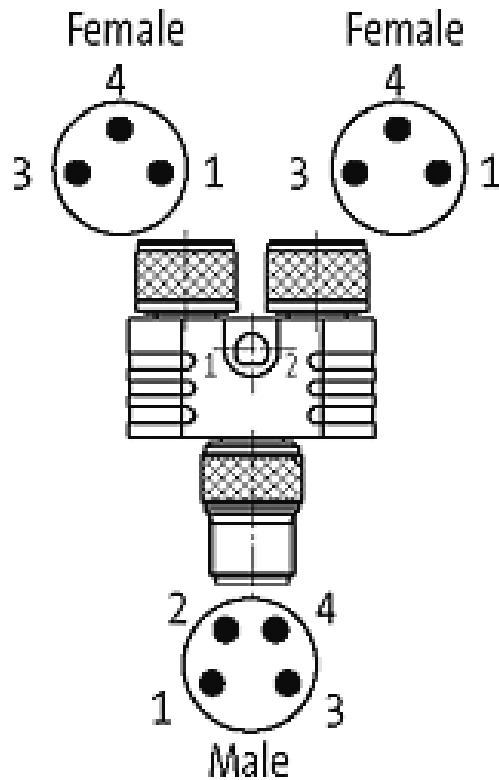

Circuit diagram

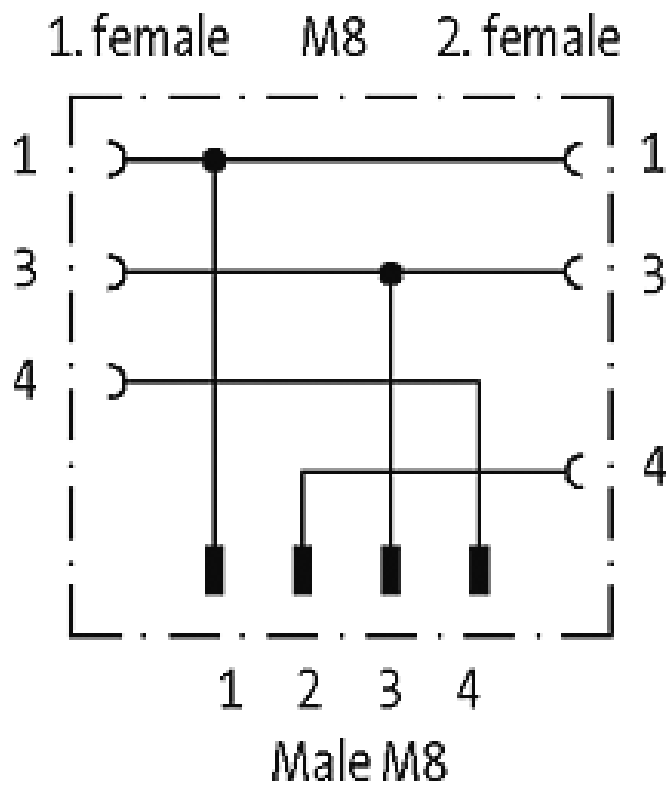

Dimension drawing

