

**M12 male on rear of MSUD valve form B 10mm**

Form B (10 mm) ? M12, connector at the rear  
without components  
3-pole

**Image**

Vicarious picture

**Approvals****Form**

41921

**Technical Data**

Operating voltage	125 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Configuration	2 contacts + PE
Switch off spike	<= 55 V
Current consumption	max. 15 mA
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C
Dimensions H × W × D	31 x 22 x 52 mm

**Commercial data**

Net weight	31
Net weight	31
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


**Comments**

Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

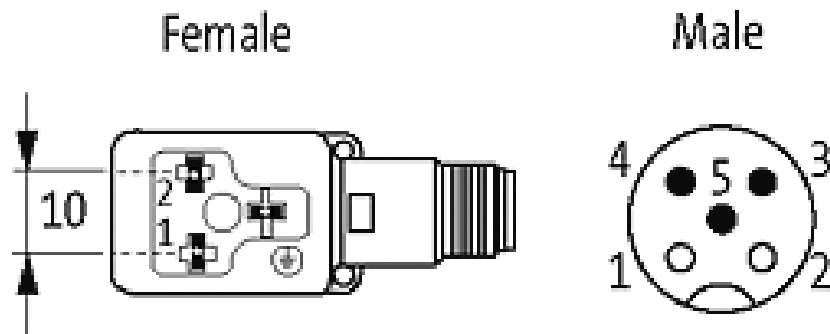

Circuit diagram

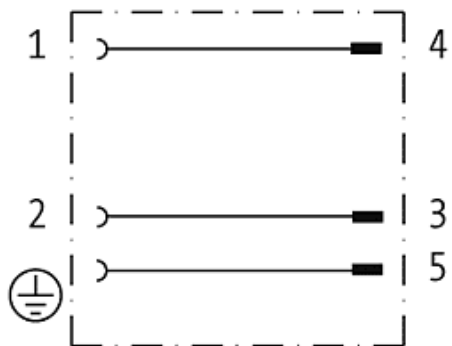

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

