


M8 male straight / M12 female 90° with LED PVC-OB 3x0,25 yellow 0,3m

Male straight to female 90°

M8 - M12, 3-pole

2 × LED (PNP), (NPN) on request

Image

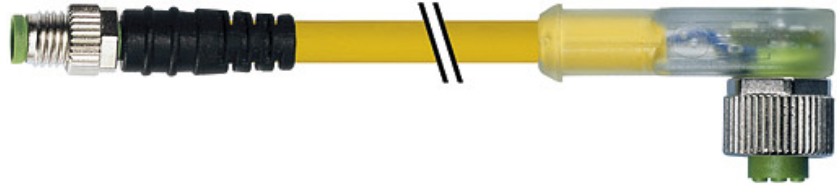

Vicarious picture

Approvals



Form

88281

Technical Data

| | |
|---------------------------------------|--------------------------------------------------------------------|
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Operating voltage | 24 V DC ±25 % |
| Operating current per contact (40 °C) | max. 4 A |
| Locking of ports | Screw thread M8 × 1 mm (recommended torque = 0.6 Nm) self-securing |
| Temperature range | -25...+85 °C, depending on cable quality |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Cable

| | |
|----------------------------|---------------------------------------------------------------|
| No./diameter of wires | 3 × 0.25 mm ² |
| Wire isolation | PVC (br, bl, bk) |
| C-track properties | Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation |
| Jacket | PVC |
| Outer diameter | approx. 4.5 mm |
| Bend radius (mobile) | 10 x outer diameter |
| Temperature range (fixed) | -30...+80 °C |
| Temperature range (mobile) | -5...+80 °C |

Commercial data

| | |
|-----------------------|----------|
| Net weight | 28 |
| Net weight | 28 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85444290 |
| Unit (piece) | 1 |
| Limited value | 1 |

Comments

Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.
 The resistance to aggressive media should be individually tested for your application. Further details on request.