

MIRO 6,2 pluggable plug in module output relay N: 60VDC - OUT: 250 VAC/DC / 6A

SNR  
2 C/O contacts  
60 V AC/DC  
plug-in relay for base sockets

## Image



Vicarious picture

**Switching capacity according to (EN 60947)**

24 V	AC12;6 A	AC15; 3 A	DC13; 1 A
110 V	AC12;6 A	AC15; 3 A	DC13; 0.2 A
230 V	AC12;6 A	AC15; 3 A	DC13; 0.1 A

**Technical Data**

Switching voltage	max. 250 V AC/DC
Switching current	max. 6 A
Breaking capacity (voltage dependent)	max. 1500 VA/120 W
Min. load current	12 V DC/10 mA
Contact material	Ag Sn O2
Hold-on	1.6 VA/0.65 W
Switching time	8/4 ms
Dimensions H x W x D	15 x 28 x 5 mm


**Commercial data**

Net weight	10
Net weight	10
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	1


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

## Circuit diagram

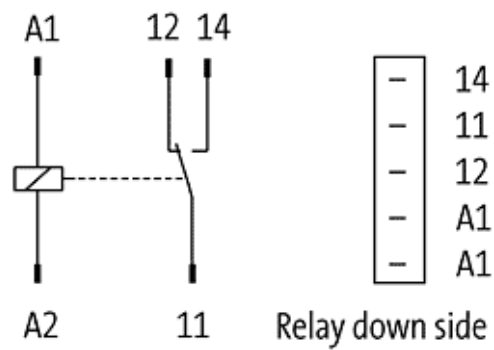

## Dimension drawing

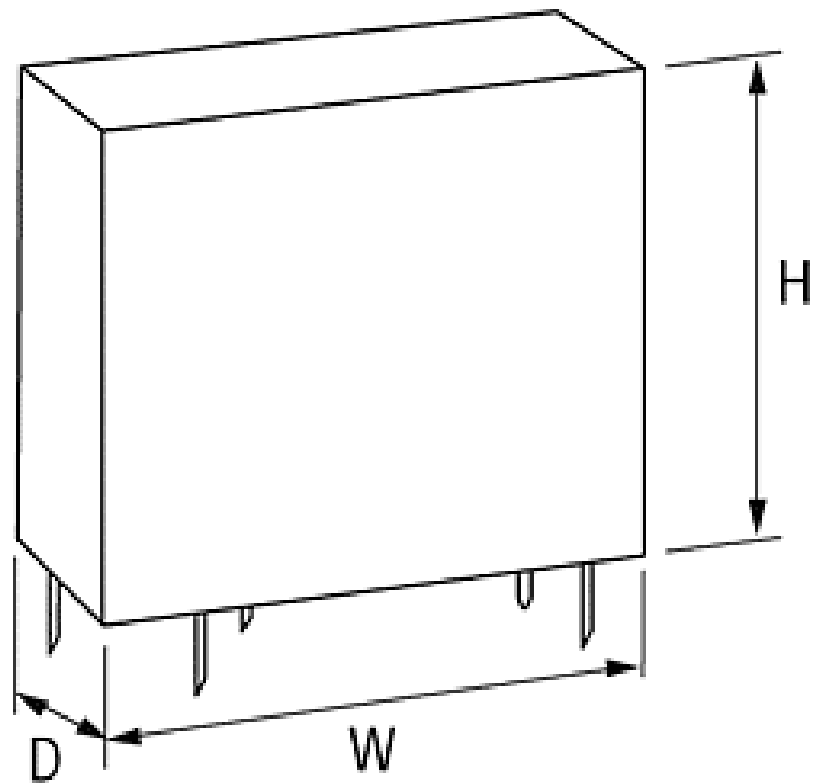

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

