

IRA Plug-in relay IN: 24 VAC - OUT: 250 VAC/DC / 7 A

4 C/O contacts  
24 V AC

## Image



Vicarious picture

**Technical Data**

|                                       |                        |
|---------------------------------------|------------------------|
| Switching voltage                     | max. 250 V AC/110 V DC |
| Switching current                     | max. 5 A               |
| Breaking capacity (voltage dependent) | max. 1250 VA/100 W     |
| Contact material                      | Ag Ni; Ag hv           |
| Hold-on                               | 1.4 VA/0.9 W           |
| Switching time                        | 18 ms                  |
| Dimensions H x W x D                  | 36 x 28 x 21 mm        |

**Commercial data**

|                       |          |
|-----------------------|----------|
| Net weight            | 18       |
| Net weight            | 18       |
| Weight unit           | gram     |
| Basic unit            | pc.      |
| Customs tariff number | 85364900 |
| Unit (piece)          | 1        |
| Limited value         | 10       |

**Accessories**

Holding clip for Industrial relay HF 143


**Art.-No.**

61406


**Comments**

Relays with other voltage available on request.

## Circuit diagram

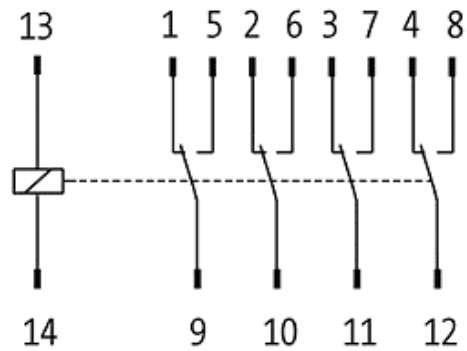

## Dimension drawing

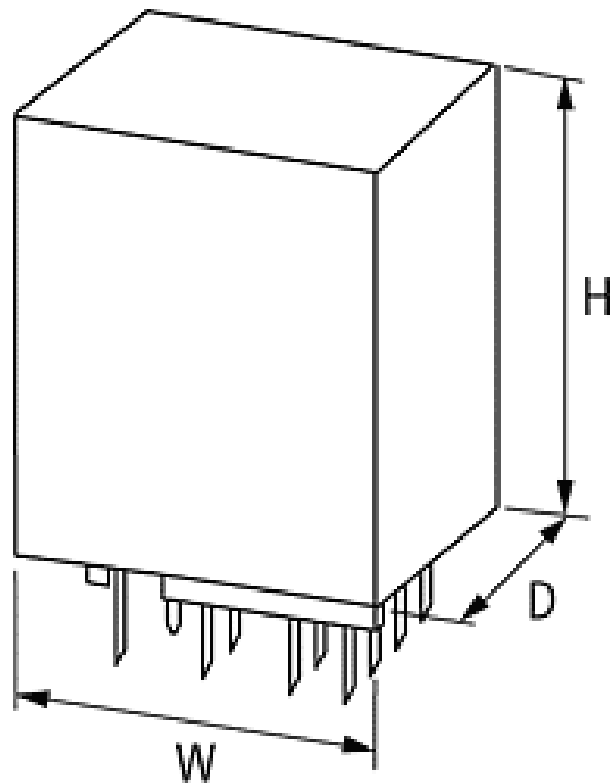

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

