

IRA 220 Plug-in relay N: 230 VAC / 250 VAC/DC / 7 A

4 C/O contacts
230 V AC

Image



Vicarious picture

Technical Data

Switching voltage	max. 250 V AC/110 V DC
Switching current	max. 5 A
Breaking capacity (voltage dependent)	max. 1250 VA/100 W
Contact material	Ag Ni; Ag hv
Hold-on	1.4 VA/0.9 W
Switching time	18 ms
Dimensions H x W x D	36 x 28 x 21 mm

Commercial data

Net weight	18
Net weight	18
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	10

Accessories

Holding clip for Industrial relay HF 143


Art.-No.

61406


Comments

Relays with other voltage available on request.

Circuit diagram

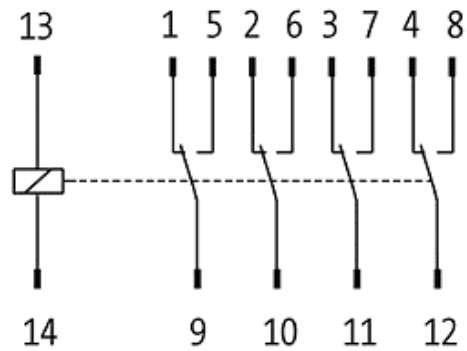

Dimension drawing

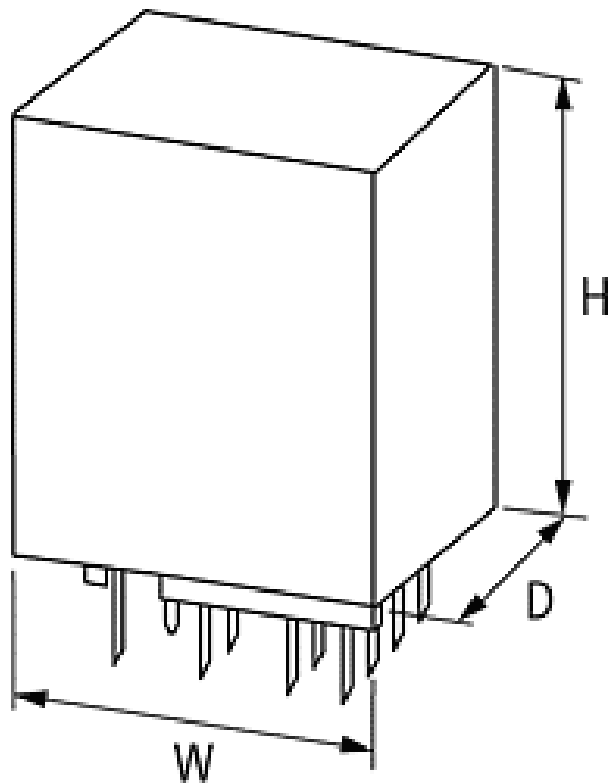

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

