

IR 24 Plug-in relay IN: 24 VDC - OUT: 250 VAC/DC / 7 A

4 C/O contacts  
24 V DC


## Image




Vicarious picture

Technical Data	
Switching voltage	max. 250 V AC/110 V DC
Switching current	max. 5 A
Breaking capacity (voltage dependent)	max. 1250 VA/100 W
Contact material	Ag Ni; Ag hv
Hold-on	1.4 VA/0.9 W
Switching time	18 ms
Dimensions H x W x D	36 x 28 x 21 mm
Commercial data	
Net weight	20
Net weight	20
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	1
Accessories	
	Holding clip for Industrial relay HF 143
	<b>Art.-No.</b> 61406
Comments	
	Relays with other voltage available on request.

## Circuit diagram

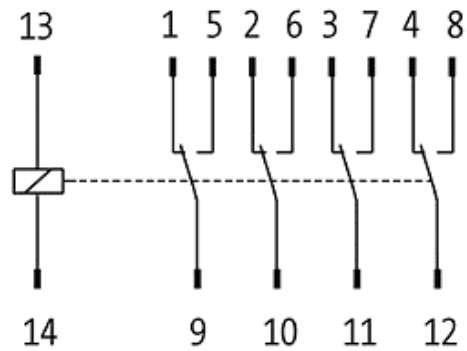

## Dimension drawing

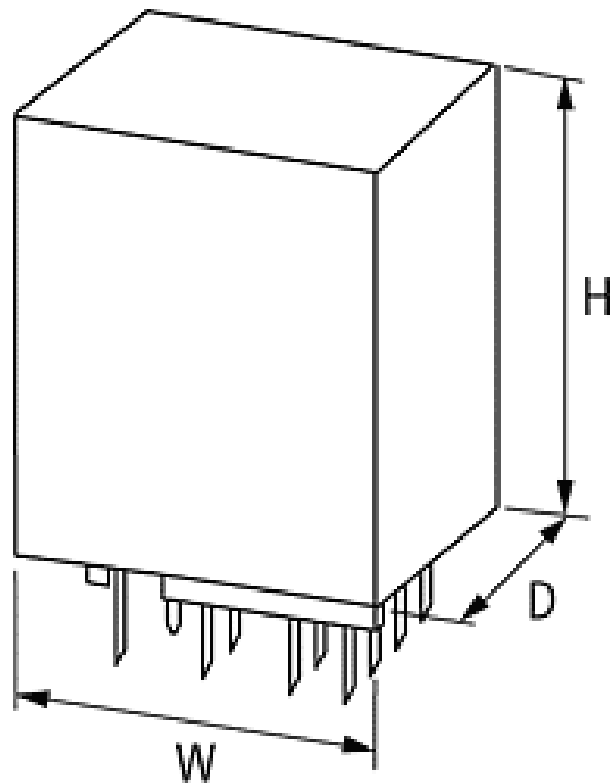

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

