


K 4-24 Plug-in relay IN: 24 VDC - OUT: 125 VAC/DC / 2 A

4 C/O contacts
24 V DC

Image



Vicarious picture

Technical Data

Switching voltage	max. 125 V AC/250 V DC
Switching current	max. 1,76A
Breaking capacity (voltage dependent)	max. 50 VA/35 W
Contact material	Ag Ni 0.15 hv; Ag hv
Hold-on	2.2 VA/0.9 W
Switching time	7.5 ms
Dimensions H x W x D	30 x 30 x 19 mm

Commercial data

Net weight	30
Net weight	30
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	1

Accessories

Holding clip for cradle relay K 4 B


Art.-No.

61428


Comments

Relays with other voltage available on request.

Circuit diagram

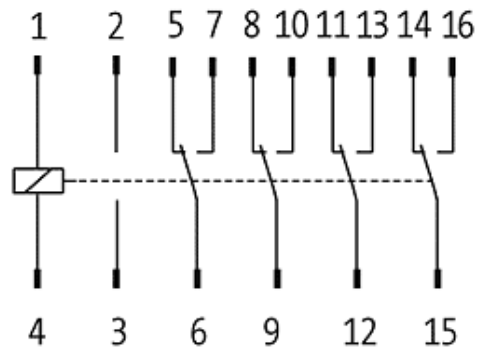

Dimension drawing

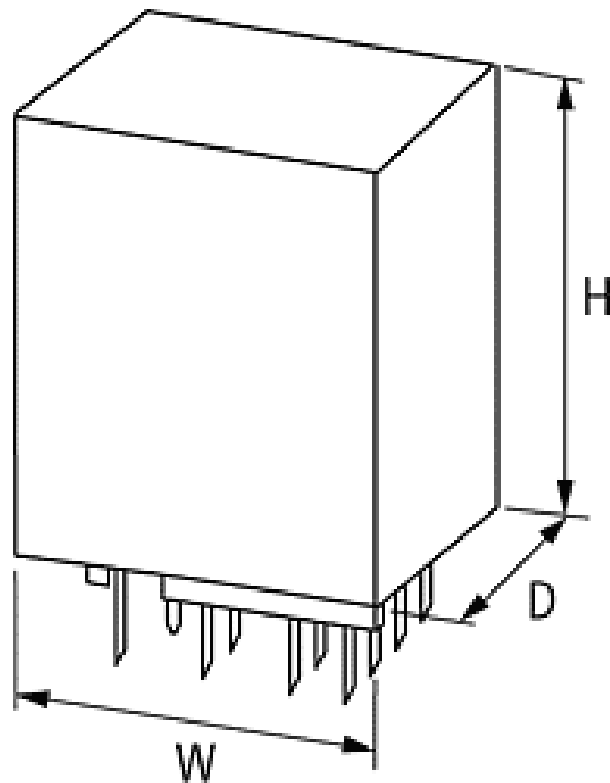

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

