


K 2-24 V DC Plug-in relay IN: 24 VDC - OUT: 125 VAC/DC / 2 A

2 C/O contacts
24 V DC

Image



Vicarious picture

Technical Data

| | |
|---------------------------------------|------------------------|
| Switching voltage | max. 125 V AC/250 V DC |
| Switching current | max. 1,76A |
| Breaking capacity (voltage dependent) | max. 50 VA/0.7 W |
| Contact material | Ag Ni 0.15 hv; Ag hv |
| Hold-on | 2.2 VA/0.7 W |
| Switching time | 6 ms |
| Dimensions H x W x D | 30 x 24 x 19 mm |


Commercial data

| | |
|-----------------------|----------|
| Net weight | 26 |
| Net weight | 26 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85364900 |
| Unit (piece) | 1 |
| Limited value | 1 |


Comments

Relays with other voltage available on request.

Circuit diagram

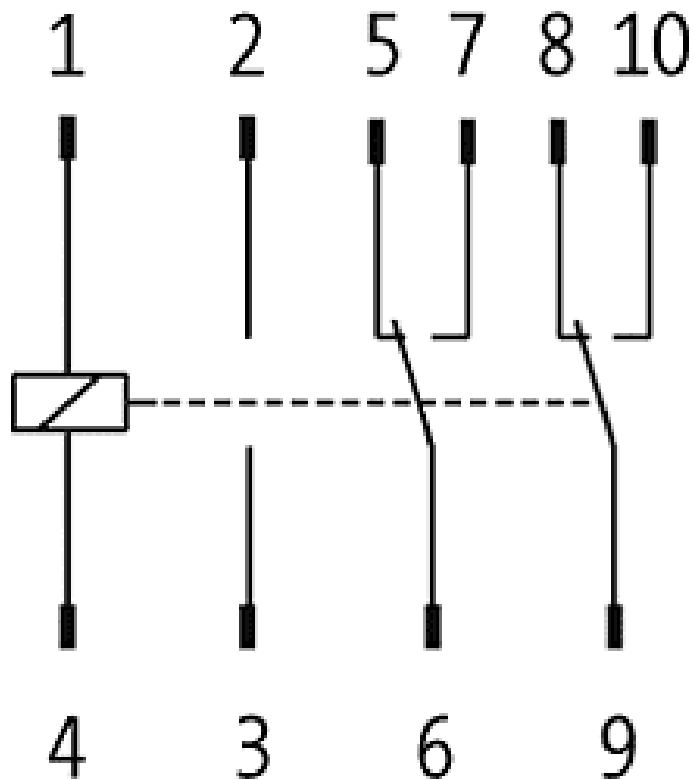

Dimension drawing

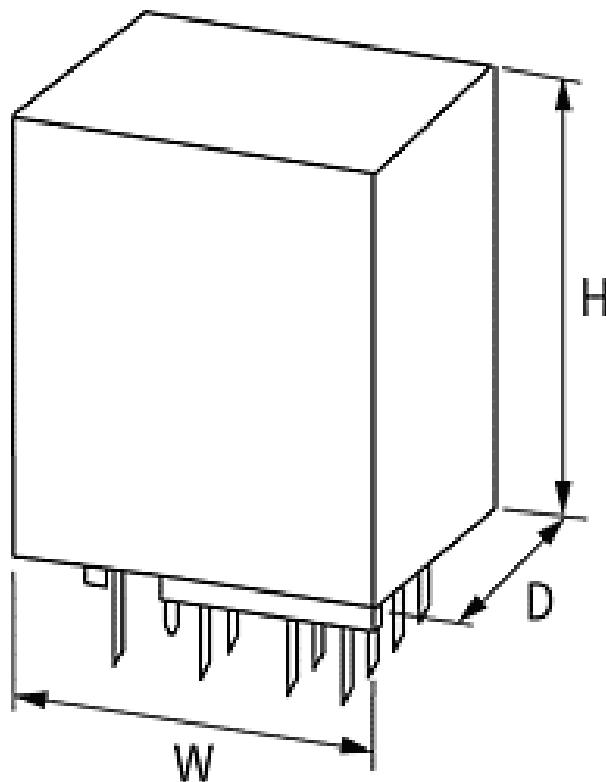

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

